





WallWasher


VP

19

Fino

Surface Mounted
Wall Washer

With its sleek design and cutting-edge LED technology, this linear tube light provides a versatile lighting solution for a wide range of applications, from commercial establishments to residential spaces. It delivers exceptional lighting quality, ensuring uniform and consistent illumination across surfaces, while also withstanding harsh weather conditions. This makes it a reliable choice for illuminating exterior facades, landscapes, and outdoor events.



VP 19 10


VP 19 15

VP 19 20

- Crafted using world-class, approved quality components
- Die-cast aluminum body with an electrostatic powder coat finish
- Extended lifespan and improved performance due to optimal heat dissipation
- Clear tempered glass diffuser
- temperature-resistant silicone gasket
- Equipped with a nickel-plated brass cable gland to enhance durability
- Exceptional light intensity while consuming minimal energy leading to high luminous efficiency
- Includes over-temperature protection to ensure safe and reliable operation
- Cost-effective due to a long lifespan and low maintenance costs
- Eco-friendly, considering low carbon emissions and radiated heat



Dimension(mm)

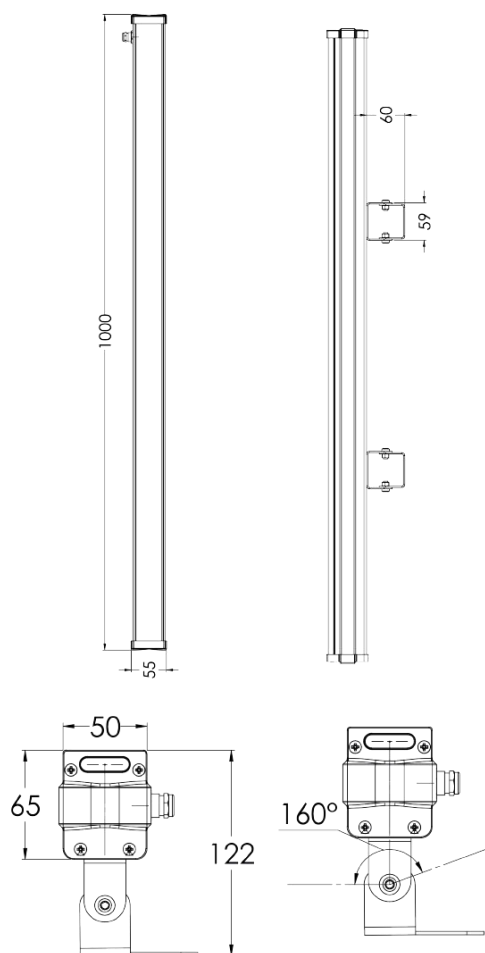

Specification

Model	VP1910 (10 watt)	VP1915 (15 watt)	VP1920 (20 watt)
Material	Extruded Aluminium		
Finishing(standard)	Anodized surface		
Installation	Surface Mounting		
Optic	Tempered Clear Glass		
IP Rating	IP66		
IK Rating	IK06		
Cable	3x0.75 mm ² NYMHY		
Life Span (L70 B10)	75,000 hrs		
CCT / Color	3000K, 6500K		
Luminous Flux	1400 Lm	2100 Lm	2750 Lm
LED Efficacy	Up to 140 Lm/W		
Nominal LED Power	96 W		
Practical LED Power	9.2 W	13.8 W	18.2 W
Power Consumption	10 W	15 W	20 W
Nominal Voltage	180 - 265 VAC		
PF(typ.)	0.6		
Insulation	CLASS I		
Control System	---		
Protection	Over Temperature Protection - Over Current Protection		
Ope. Ambient Temp.	-10 °C to +40 °C		
Size (L x W x H)	1000 x 55 x 65 mm		
Weight	2.2 Kg		